

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 33 TWN. 17_N RNG. 2_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 6-23-09
Party Chief: Greene
Crew: Taylor
Type of Marker: 4" x 4" monument w/ 10" x 10" post
Method of Establishment: County: 12-7-1990
IN S.P.C. E Zone, NAD 83
Name: 17023307
N: 512 877.159 5(m)
E: 44 388.112 7(m)

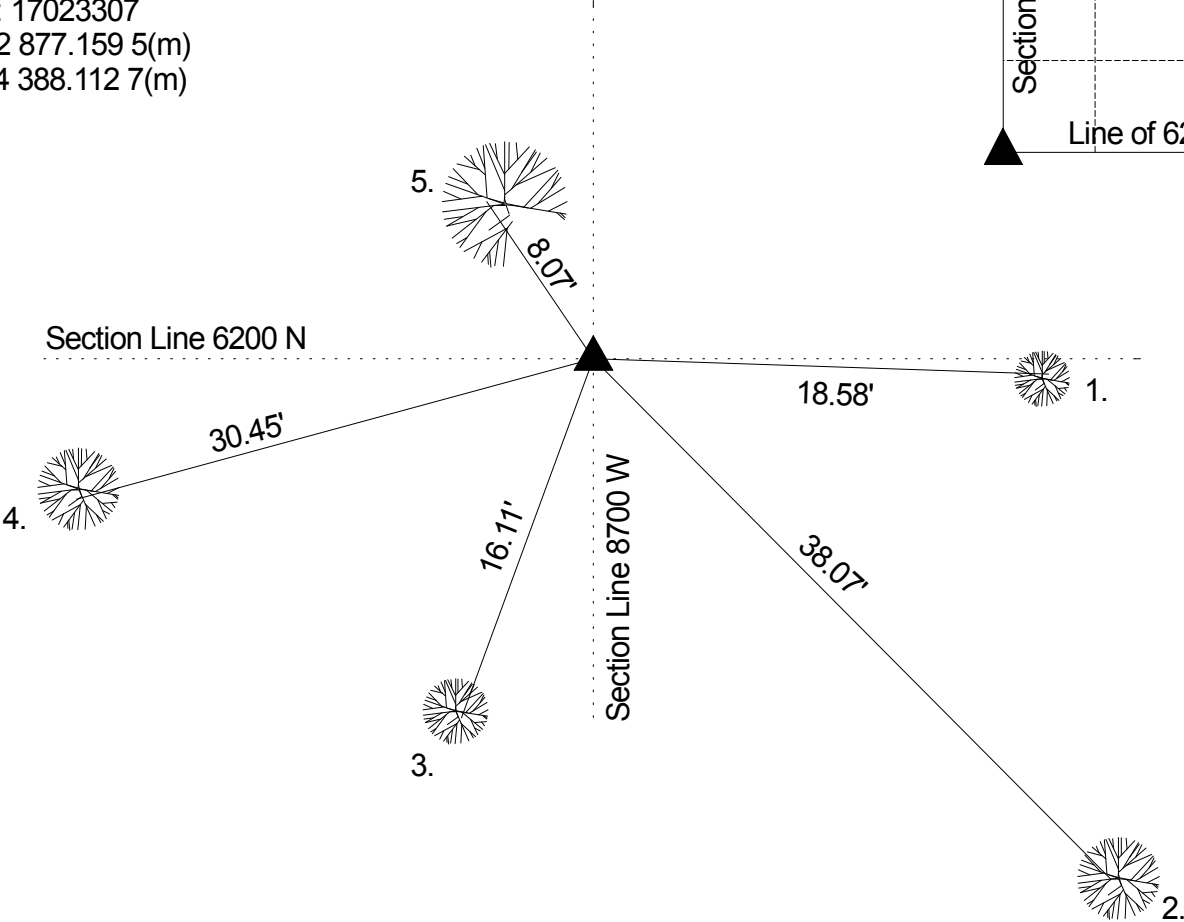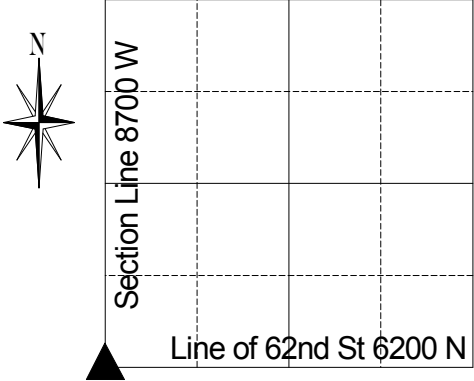

Corner originally set as a post in 1821 by Wm. B. Laughlin with the following witnesses: 10" beech bearing S 45 E 3 links and an 8" dogwood bearing N 26 W 18 links (Marion County Atlas p. 4). A survey by Percy Hasbrook on September 16, 1848 indicates no stone or witnesses (Pike Legal Book p. 48). Corner referenced by MCS on 3/13/1969 and called a cut stone. Corner referenced by Miller on 5/14/75 and called a concrete monument. Corner referenced by Wilcoxon on 12/7/90 and called a 4"x4" concrete monument beside a 10"x10" fence post. Corner referenced by Wilcoxon on 3/10/1999 and called a 4"x4" concrete monument. Corner referenced by Wilcoxon on 3/10/2000 and called a 4"x4" concrete marker with 10"x10" post beside it. Corner referenced by Wilcoxon on 4/18/05 and called a 4"x4" concrete monument with 10"x10" fence post beside it. Corner referenced by Greene on 6/23/09 and called a 4"x4" concrete monument with 10"x10" fence post beside it.

REF.	DISTANCE	DESCRIPTION
1.	18.58'	Mag nail w/brass washer NE 6" hickory 12" up
2.	38.07'	Mag nail w/brass washer W 25" poplar 10" up
3.	16.11'	Mag nail w/brass washer SE 10" hickory 8" up
4.	30.45'	Mag nail w/brass washer S 20" ash 12" up
5.	8.07'	Mag nail w/washer and shiner W 42" maple 8" up